


## OPK SERIES PUSH-IN TYPE TERMINAL BLOCKS OPK SERİSİ YAY BASKILI RAY KLEMENSLER

**PUSH IN**



**OPK 4**

Order No: 1512

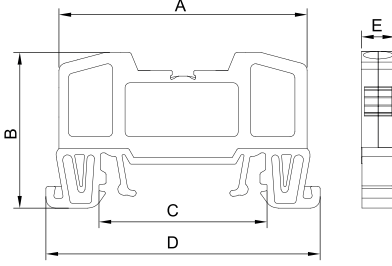

Dimensions Ölçüler (mm)	A	B	C	D	E
	51,0	32,0	34,5	56,4	6,7

### MATERIAL / MATERYAL

Body / Gövde	PA6.6 V2
Bridge / Köprü	Copper / Bakır
Orange Button Turuncu Buton	PA6.6 V2
Spring/ Yay	Stainless Steel / Paslanmaz Çelik
Temp./ Sıcaklık	-40 °C, +140 °C
Cable Strip L. / Soyma Boyu	9 mm

DATA / VERİ	TSE / CE	UL
Voltage / Gerilim	750 V	600 V
Current / Akım	32 A	26 A
Section / Kesit	4,0 mm <sup>2</sup>	10 AWG
Norm	EN-60947-7-1	UL 1059

### RENKLER / COLOURS

RENK / COLOUR	Order No. / Sip.No.	Pcs. / Ad.
GREY / GRİ	1512	100
CREAM / KREM	1513	100
BLACK / SİYAH	1514	100
BLUE / MAVİ	1515	100
BROWN / K.RENGİ	1516	100
RED / KIRMIZI	1517	100
YELLOW / SARI	1518	100
GREEN / YEŞİL	1519	100

### ACCESSORIES / AKSESUARLAR

Cross Connection / Köprü	Order No./ Sip. No.	Section/ Kesit	Pcs./ Ad.
	1930	4 / 2	100
	1931	4 / 3	100
	1932	4 / 4	50
	1933	4 / 10	30
	1934	4 / 20	20
Stopper / Durdurucu	1202, 1222, 1212		
Group Sticker / Grup Etiketi	1232		
Marking / Markalama	9770 / 4440 / 4442 / 9540 / 7301		