


## OPK SERIES PUSH-IN TYPE TERMINAL BLOCKS (1 IN/2 OUT) OPK SERİSİ YAY BASKILI TİP RAY KLEMENSLER (1 GİRİŞ/2 ÇIKIŞ)

**PUSH IN**



**OPK - 2,5**  
Order No: 1262

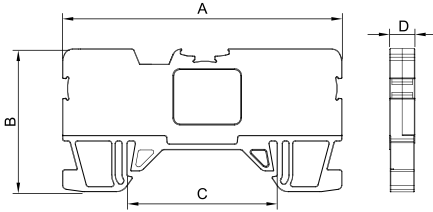

Dimensions Ölçüler (mm)	A	B	C	D
	64,8	33,0	34,5	5,9

### MATERIAL / MATERYAL

Body / Gövde	PA6.6 V2
Bridge / Köprü	Copper / Bakır
Orange Button Turuncu Buton	PA6.6 V2
Spring/Yay	Stainless Steel / Paslanmaz Çelik
Temp./ Sıcaklık	-40 °C, +140 °C
Cable Strip L./ Soyma Boyu	9 mm

DATA / VERİ	TSE / CE
Voltage / Gerilim	750 V
Current / Akım	24 A
Section / Kesit	2,5 mm <sup>2</sup>
Norm	EN-60947-7-1

### RENKLER / COLOURS

RENK/COLOUR	Order No./ Sip.No.	Pcs./ Ad.
GREY / GRİ	1262	50
CREAM / KREM	1263	50
BLACK / SİYAH	1264	50
BLUE / MAVİ	1265	50
BROWN/K.RENGİ	1266	50
RED / KIRMIZI	1267	50
YELLOW / SARI	1268	50
GREEN / YEŞİL	1269	50

### ACCESSORIES / AKSESUARLAR

Cross Connection / Köprü	Order No./ Sip. No.	Section/ Kesit	Pcs./ Ad.
	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper / Durdurucu	1202,1222,1212		
Group Sticker/Grup Etiketi	1232		
Marking / Markalama	9770 / 4440 / 4442 / 9540 / 7301		