


## OPK SERIES PUSH-IN TYPE TERMINAL BLOCKS OPK SERİSİ YAY BASKILI RAY KLEMENSLER

**PUSH IN**



**OPK 10**  
Order No: 1532

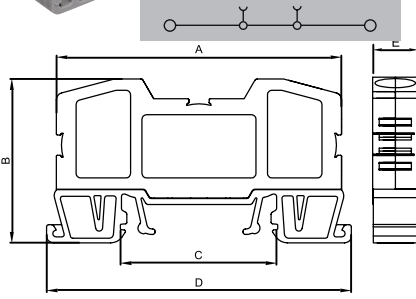

Dimensions Ölçüler (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	9,5

### MATERIAL / MATERYAL

Body / Gövde	PA6.6 V2
Bridge / Köprü	Copper / Bakır
Orange Button Turuncu Buton	PA6.6 V2
Spring/Yay	Stainless Steel / Paslanmaz Çelik
Temp./Sıcaklık	-40 °C, +140 °C
Cable Strip L. / Soyma Boyu	12 mm

DATA / VERİ	TSE / CE
Voltage / Gerilim	750 V
Current / Akım	57 A
Section / Kesit	10 mm <sup>2</sup>
Norm	EN-60947-7-1

### RENKLER / COLOURS

RENK/COLOUR	Order No. / Sip.No.	Pcs. / Ad.
GREY / GRİ	1532	100
CREAM / KREM	1533	100
BLACK / SİYAH	1534	100
BLUE / MAVİ	1535	100
BROWN/K.RENGİ	1536	100
RED / KIRMIZI	1537	100
YELLOW / SARI	1538	100
GREEN / YEŞİL	1539	100

### ACCESSORIES / AKSESUARLAR

Cross Connection / Köprü	Order No./ Sip. No.	Section/ Kesit	Pcs./ Ad.
	1950	10 / 2	100
	1951	10 / 3	50
	1952	10 / 4	50
	1953	10 / 10	15
	1954	10 / 20	10
Stopper / Durdurucu	1202,1222,1212		
Group Sticker/Grup Etiketi	1232		
Marking / Markalama	9770 / 4440 / 4442 / 9540 / 7301		